

Aluminium – A Vent Nu-Build Vent




Aluminium – A Vent

Description	Part No	Equivalent Area (mm ²)	Colour	Box Qty
3000A 12mm	49.5200.30.300	1900	White	50
	49.5200.32.300	1900	Brown	50
3000A 16mm	49.5600.30.300	1700	White	50
	49.5600.32.300	1700	Brown	50
4000A 12mm	49.5200.30.400	2700	White	50
	49.5200.32.400	2700	Brown	50
4000A 16mm	49.5600.30.400	2400	White	50
	49.5600.32.400	2400	Brown	50
6000A 12mm	49.5200.30.600	4000	White	50
	49.5200.32.600	4000	Brown	50
6000A 16mm	49.5600.30.600	3400	White	50
	49.5600.32.600	3400	Brown	50
8000A 12mm	49.5200.30.800	5100	White	50
	49.5200.32.800	5100	Brown	50
8000A 16mm	49.5600.30.800	4000	White	50
	49.5600.32.800	4000	Brown	50



- **Manufactured from aluminium alloy**
- **Provides ventilation in line with current building regulations**
- **Front operated**

The stylish Aluminium range is a slim-line ventilator providing ventilation in line with current Building Regulations. The unique patented operating mechanism allows for easy controllable ventilation.

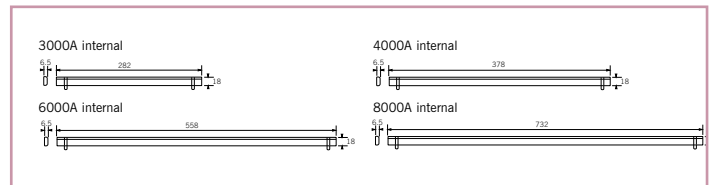

Nu-Build – Over Frame Ventilation System

- **Designed for use in new build applications**
- **Slim and unobtrusive design**
- **Maintains integrity of window frame**

This system prevents the need for routing through the frame, thus reducing installation time. In-house manufacture ensures that correct levels of ventilation are achieved in line with current Building Regulations.

Ventilator Options

A Vent – simple surface mounting, stylish slimline design.

T vent – low profile, simply clips in.

D Vent – internal control unit, flexible use.

GB Recessed Flyscreens – meets BS 5440 Part 2:2000

Available in White, Brilliant White and Brown.

**Custom made to your requirements,
please contact our sales office.**

