


Panic Exit Hardware Push Bar Bolt Operation

- Certified to EN1125: 1997 + A1: 2001
- CE marked
- Shoot bolt locking as standard
- Non handed
- Modern design




Additional security is provided with this new innovative design. Combining all of the usual surface mounted features while improving the security using steel shoot bolt operation. Standard units are suitable for doors up to 2440mm high and 1220 wide, with keep options available to suit Timber, PVC-u and Aluminium door profiles.

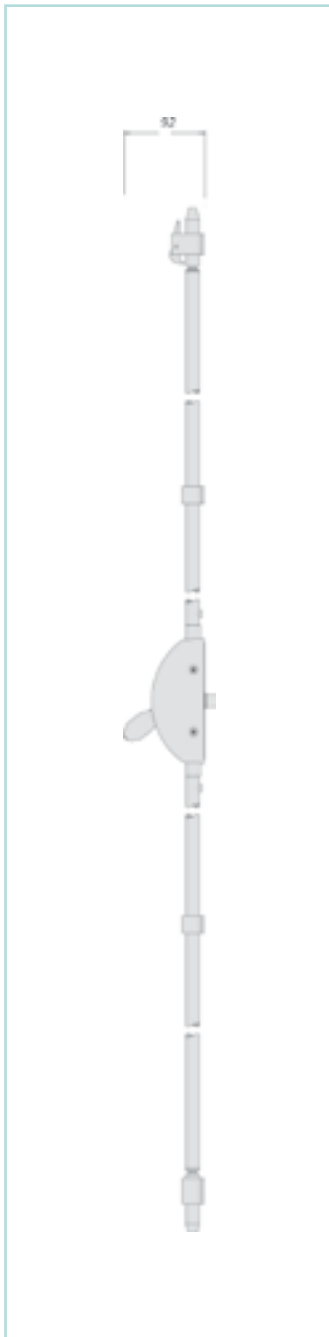


- Strong die-cast zinc body with steel shoot bolts
- Universal operation for easy fitting
- Double door sets available
- Lock operates on closing
- Designed to use outside access lever device when required
- Choice of colours available on request

Push Bar Operation

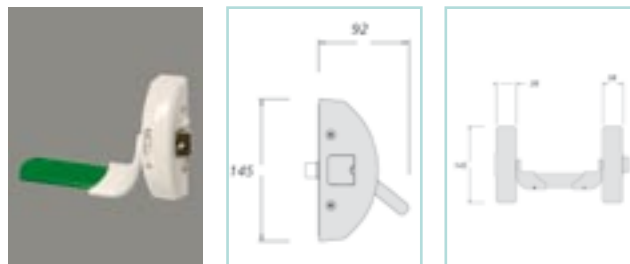

Optional Outside Access Device, comes as standard in Lever operation with Euro Cylinder

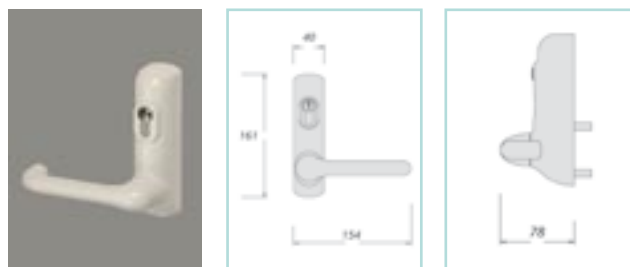

Outside Access Device

Description	Part No.	Box Qty
2 Point Push Bar Bolt Locking White Finish	95.1000.00.502	1
3 Point Push Bar Bolt Locking White Finish	95.1000.00.503	1
Top Shoot Bolt Keep	95.1001.00.150	1
Bottom Shoot Bolt Keep	95.1001.00.151	1
Bottom Shoot Bolt Keep to Suit Low Threshold	95.1001.00.159	1
Centre Pullman Latch Keep	95.1001.00.156	1
Outside Access Device C/W Lever Operated Euro Cylinder White	95.1000.30.500	1

Top Shoot Keep



Bottom Shoot Keep

